

SL16S Venetian

ScreenLine® SL16S Venetian is a manually-operated patented magnetic system with raising and tilting function for venetian blinds encapsulated within 16-mm cavity insulating glass units.

SL16S Venetian is operated by a magnetic slider, placed on the right or left-hand edge of the glass. A narrow adhesive transparent profile ensures the linear movement of the slider. The blind is raised and lowered by moving the slider up or down and is tilted by slightly lifting or lowering the same slider.

SL16S Venetian is suited to all types of window frames. It ensures with time the insulating properties of the double glazing unit, notably protection from dirt or weather conditions. The integrated unit can be fitted into the window frame like standard IGUs.


The system is supplied with warm edge spacer bar as standard.



COLOUR RANGE



FEASIBILITY CHARTS

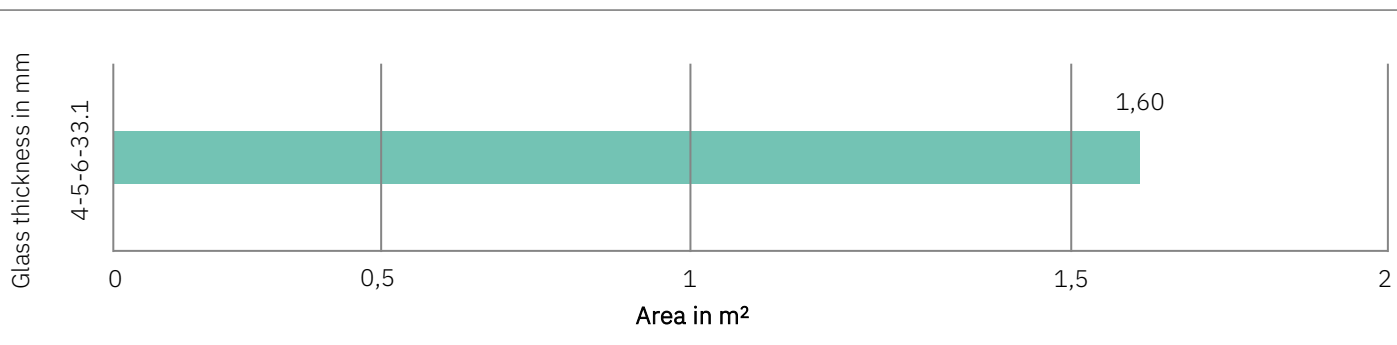

Possible dimensions

W min = 300 mm W max = 1200 mm
H min = 500 mm H max = 2200 mm

Maximum height possible according to width
with W from 300 to 370 mm H max = 1000 mm
with W from 371 to 1200 mm H max = 2200 mm*

* For areas from 1.61 m² to 2.4 m², blind supplied with tilt-only function and completely raised