

# SL20-22C Venetian

ScreenLine® SL20-22C is a patented magnetic system with manual operation (raising and tilting function) for venetian blinds incorporated within 20-mm or 22-mm insulating glass units.

The external magnetic device applied on the glass by means of high-resistance adhesive tape contains a cord loop and a magnet that is perfectly interfaced with the magnetic joint of the internal drive, which is completely housed inside the head rail. The movement provided to the cord enables the rotation of the magnets that activate the blind.

The cord is kept under tension by means of a special cord tensioner applied on the glass.

SL20-22C is particularly suited to structural façades, although there are actually no limits to its application.

It ensures with time the insulating properties of the double or triple glazing unit, notably protection from dirt or weather conditions. The integrated unit can be fitted into the window frame like standard insulating glass.


The system is supplied with warm edge spacer bars as standard.



## COLOUR RANGE



## FEASIBILITY CHARTS

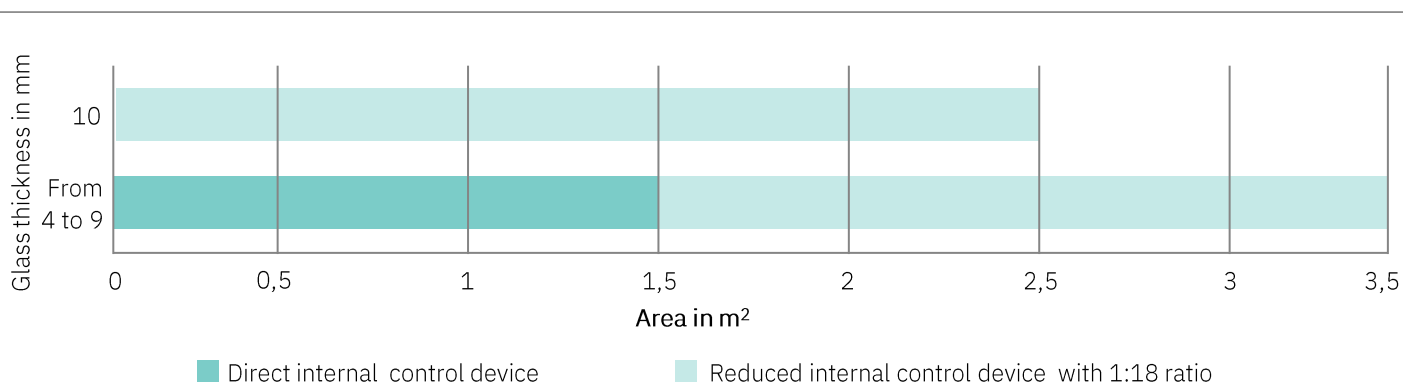

### Possible dimensions

W min = 300 mm    W max = 2000 mm  
H min = 300 mm    H max = 2600 mm

### Maximum height possible according to width

with W from 300 to 350 mm    H max = 1100 mm\*  
with W from 351 to 400 mm    H max = 1800 mm\*  
with W from 401 to 450 mm    H max = 2150 mm\*  
with W from 451 to 2000 mm    H max = 2600 mm\*\*

\* Up to H = 2600 mm, blind supplied with tilt-only function and locked bottom rail

\*\* For areas from 3.51 m<sup>2</sup> to 5.2 m<sup>2</sup>, blind supplied with tilt-only function and completely raised (with 10-mm glass from 2.51 to 5.2 m<sup>2</sup>)