

SL20-22S Pleated

ScreenLine® SL20-22S Pleated is a patented magnetic system with manual operation (raising function) for pleated blinds incorporated within 20-mm or 22-mm double glazing units and fitted into window frames with whatever degree of inclination.

The blind movement is transferred from a magnetic device (consisting in a removable knob) positioned centrally on the outer surface of the internal glass to a similar internal magnet located in the moveable head-rail, so as to absorb possible glass deflections. The blind can be adjusted and locked, through a special brake, at any inclination and raised in all directions: from right to left, left to right, from the top to the bottom and vice versa.

The performances in terms of heat reflection and adjustment of light transmission of Verosol® pleated fabrics, which are coated with an aluminium layer on one side, are optimised by special "U"-shaped spacer bars.


The special features and the high product quality make the system ideal for attic, dormer and skylight applications.

SL20-22S ensures with time the insulating properties of the double glazing unit, notably protection from dirt or weather conditions. The integrated unit can be fitted into the window frame like standard insulating glass.

The system is supplied with warm edge spacer bars as standard.



FEASIBILITY CHARTS

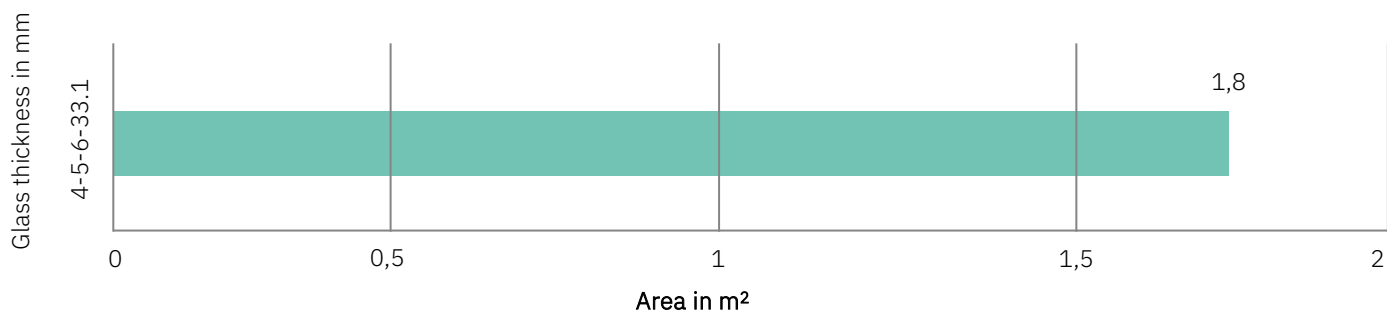

Possible dimensions


W min = 200 mm W max = 1200 mm

H min = 200 mm H max = 2000 mm



COLOUR RANGE

Verosol fabric – metallised on the outside

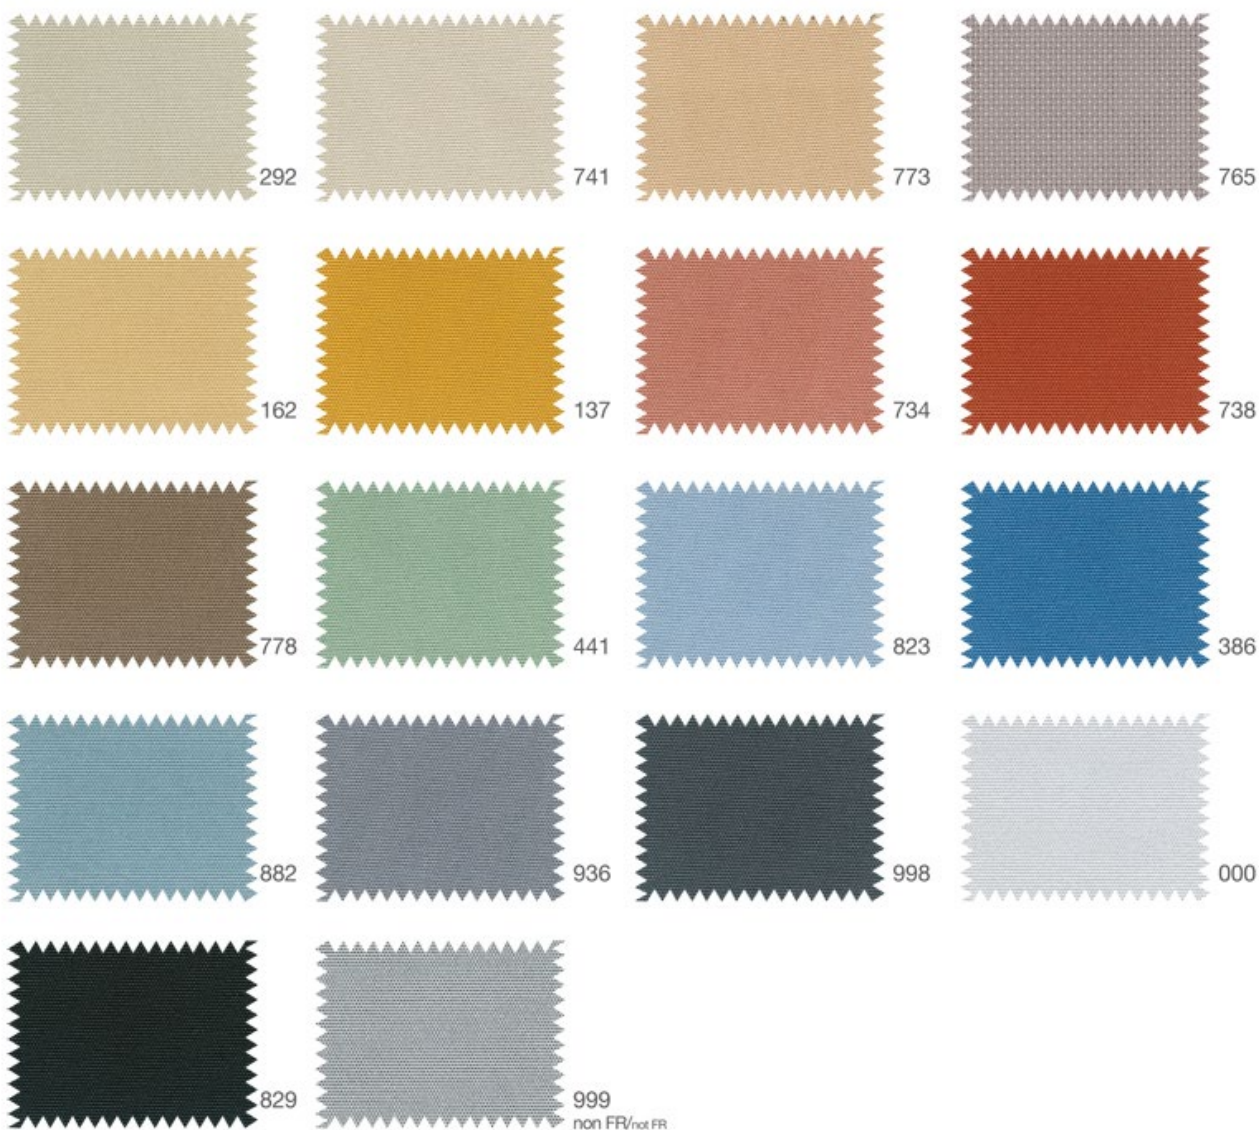

Verosol metallised



816 FR

Transparent

812 FR

Semi-transparent

878 FR

Opaque

Pleated Vanity not metallised



C000

C010