

# SL27-29-32C Pleated

The ScreenLine® blind SL27-29-32C Pleated for incorporation within insulating glass is manufactured in accordance with high technical specifications and production standards.

The blind operation is achieved using a rotational magnetic transmission through the glass thereby guaranteeing the unit's hermetic seal. The external magnet, fixed to the internal glass by double sided high-performance adhesive tape allows perfect alignment with the internal magnet.

The blind is raised and lowered using a continuous cord loop that drives the external magnet. The cord is held lightly under tension by a cord tensioner on the glass directly below the external magnet.


A dedicated mechanical end stop inside the head rail ensures a safe stop of the blind in the bottom position.

SL27-32C ensures with time the insulating properties of the double or triple glazing unit, notably protection from dirt or weather conditions. The integrated unit can be fitted into the window frame like standard insulating glass.

System SL29C Pleated is supplied with warm edge spacer bars as standard.



## FEASIBILITY CHARTS

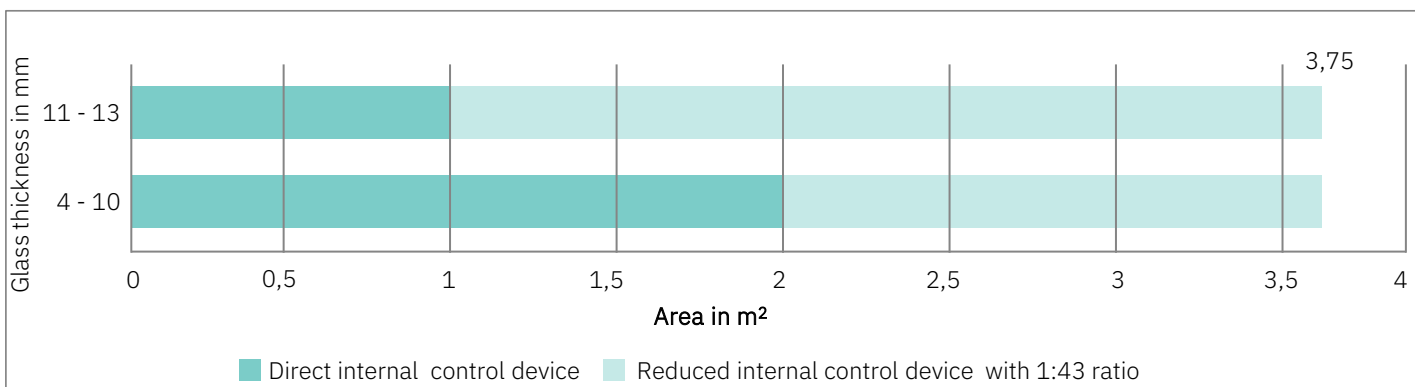

## SL27C Pleated

### Possible dimensions

W min = 300 mm    W max = 1500 mm  
H min = 300 mm    H max = 2500 mm

Maximum height possible according to width

with W from 300 to 350 mm	H max = 750 mm
with W from 351 to 480 mm	H max = 1800 mm
with W from 481 to 550 mm	H max = 2400 mm
with W from 551 to 1500 mm	H max = 2500 mm



## SL29C Pleated

Possible dimensions:

W min = 340 mm    W max = 1500 mm

H min = 300 mm    H max = 2500 mm

Maximum height possible according to width

with W from 340 to 400 mm    H max = 800 mm

with W from 401 to 480 mm    H max = 1800 mm

with W from 481 to 550 mm    H max = 2400 mm

with W from 551 to 1500 mm    H max = 2500 mm

## SL32C Pleated

Possible dimensions:

W min = 300 mm    W max = 1500 mm

H min = 300 mm    H max = 2500 mm

Maximum height possible according to width

with W from 300 to 350 mm    H max = 550 mm

with W from 351 to 480 mm    H max = 1600 mm


with W from 481 to 550 mm    H max = 2200 mm

with W from 551 to 1500 mm    H max = 2500 mm



## COLOUR RANGE

*Verosol fabric – metallised on the outside*

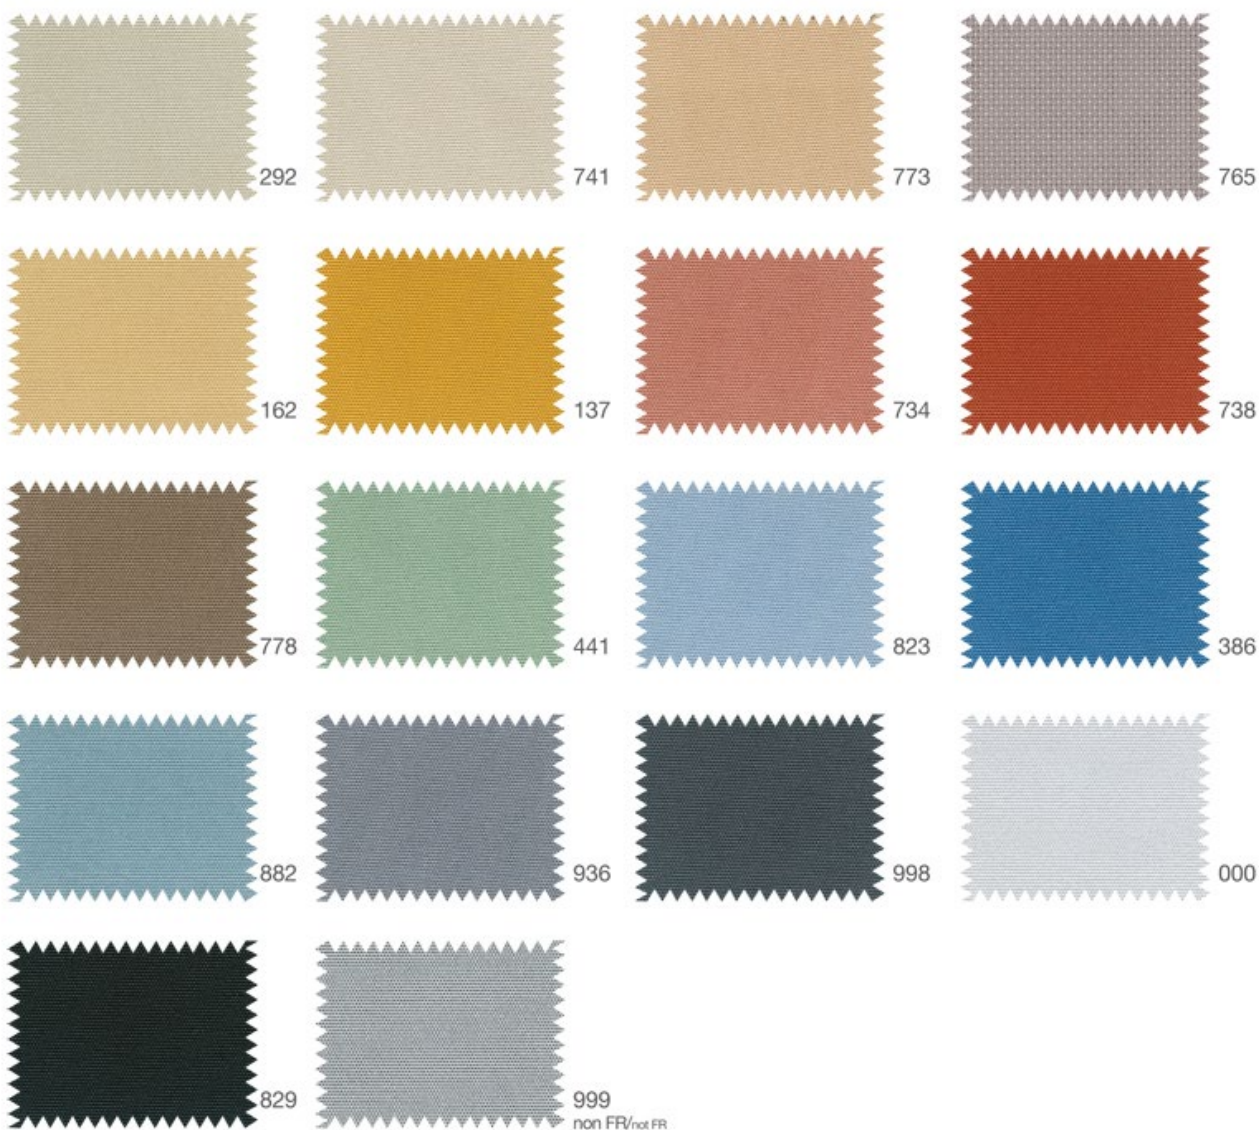

*Verosol metallised*



816 FR

Transparent

812 FR

Semi-transparent

878 FR

Opaque

*Pleated Vanity not metallised*



C000

C010