

# SL27-29-32C Venetian

ScreenLine® SL27-29-32C is a patented magnetic system with manual operation (raising and tilting function) for venetian blinds incorporated within 27-mm or 29-mm or 32-mm insulating glass units.

The external magnetic device applied on the glass by means of high-resistance adhesive tape contains a cord loop and a magnet that is perfectly interfaced with the magnetic joint of the internal drive, which is completely housed inside the head rail. The movement provided to the cord enables the rotation of the magnets that activate the blind.

The cord is kept under tension by means of a special cord tensioner applied on the glass.


SL27-29-32C venetian is particularly suited for structural façades, although there are actually no limits to its application.

It ensures with time the insulating properties of the double or triple glass unit, notably protection from dirt or weather conditions. The integrated unit can be fitted into the window frame like standard insulating glass.


System SL29C is supplied with warm edge spacer bars as standard.



## **COLOUR RANGE**



## **FEASIBILITY CHARTS**

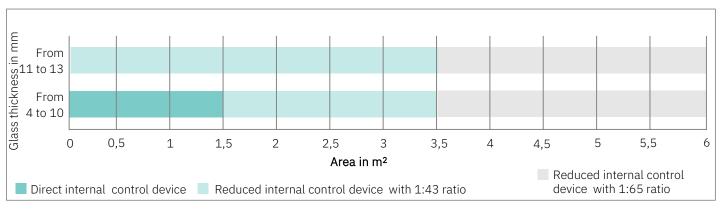

### **SL27C Venetian**

#### Possible dimensions

W min = 300 mm W max = 3000 mm H min = 300 mm H max = 3000 mm

#### Maximum height possible according to width

#### Blind with raising and tilting functions

 with W from 300 to 350 mm
 H max = 750 mm\*

 with W from 351 to 480 mm
 H max = 1800 mm\*

 with W from 481 to 580 mm
 H max = 2400 mm\*

 with W from 581 to 3000 mm
 H max = 3000 mm\*\*



 $<sup>\</sup>star$  Up to H = 3000 mm, blind supplied with tilt-only function and locked bottom rail (SL27/29/32A)

<sup>\*\*</sup> For areas from 6.01 m2 to 9 m2, blind supplied with tilt-only function and completely raised.



### **SL29C Venetian**

Possible dimensions

W min = 340 mm W max = 3000 mm H min = 300 mm H max = 3000 mm Maximum height possible according to width

#### Blind with raising and tilting functions

 with W from 340 to 400 mm
 H max = 770 mm\*

 with W from 401 to 480 mm
 H max = 1800 mm\*

 with W from 481 to 580 mm
 H max = 2890 mm\*

 with W from 581 to 3000 mm
 H max = 2680 mm\*\*

### **SL32C Venetian**

Possible dimensions

W min = 300 mm W max = 3000 mm H min = 300 mm H max = 3000 mm Maximum height possible according to width

#### Blind with raising and tilting functions

with W from 300 to 350 mm

with W from 351 to 480 mm

with W from 481 to 580 mm

With W from 581 to 3000 mm

H max = 550 mm\*

H max = 1600 mm\*

H max = 2200 mm\*



<sup>\*</sup> Up to H = 3000 mm, blind supplied with tilt-only function and locked bottom rail (SL27/29/32A)

<sup>\*\*</sup> For areas from 6.01 m2 to 9 m2, blind supplied with tilt-only function and completely raised.