

# SL27-29-32MB Venetian

ScreenLine® SL27-29-32MB is a **motorised** system with **raising and tilting** function for **venetian** blinds incorporated within 27-mm or 29-mm or 32-mm insulating glass units.

The blind is raised or lowered via a device consisting of a brushless motor controlled by a wide range of control units (compatible with the main BMS systems), which allows the simultaneous and synchronised operation of several blinds and the accurate tilting of the slats.

The motor and the entire electronic blind management system are positioned within the head rail, on a specially designed slide that reduces vibrations, thus making the system very silent.

No other control device is applied on glass or window frame, since the motor is activated by means of wall-mounted push buttons or remote control (options). The purity of the aesthetic appearance and the high technical performances of the system make it particularly suited to **prestigious projects**.

The kit can be assembled, mounted and transported very quickly and easily.

It ensures with time the insulating properties of the insulating glass unit, notably protection from dirt or weather conditions.


System SL29MB is supplied with warm edge spacer bar as standard.



## COLOUR RANGE



## FEASIBILITY CHARTS

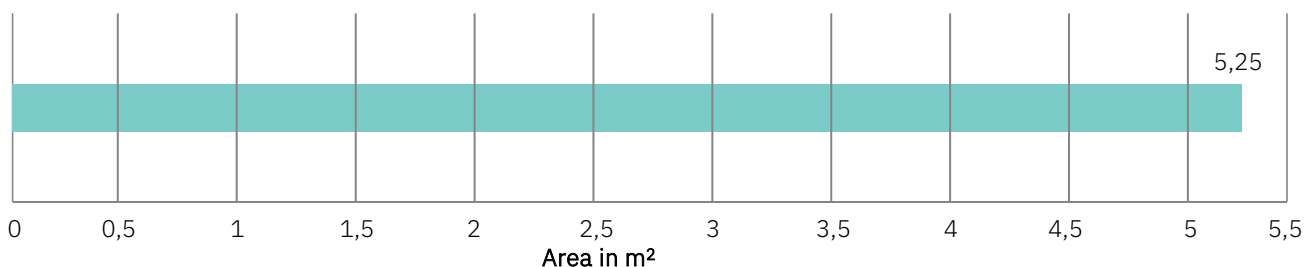

## SL27MB SL32MB Venetian

Possible dimensions:

W min = 320 mm    W max = 3000 mm

H min = 300 mm    H max = 3000 mm

Maximum height possible according to width

Tilt-only blind

with W from 320 to 389 mm    H max = 3000 mm

Blind with raising and tilting functions

with W from 390 to 419 mm    H max = 1000 mm\*

with W from 420 to 449 mm    H max = 1600 mm\*

with W from 450 to 599 mm    H max = 2100 mm\*

with W from 600 to 3000 mm    H max = 3000 mm\*\*

\* Up to H = 3000 mm, blind supplied with tilt-only function and locked bottom rail

\*\* For areas from 5.26 m<sup>2</sup> to 9 m<sup>2</sup>, blind supplied with tilt-only function and completely raised.



## SL29MB Venetian

Possible dimensions:

W min = 340 mm    W max = 3000 mm

H min = 300 mm    H max = 3000 mm

Maximum height possible according to width

### Tilt-only blind

with W from 340 to 399 mm    H max = 3000 mm

### Blind with raising and tilting functions

with W from 400 to 430 mm    H max = 1090 mm\*

with W from 431 to 460 mm    H max = 1620 mm\*

with W from 461 to 490 mm    H max = 2150 mm\*

with W from 491 to 520 mm    H max = 2680 mm\*

with W from 521 to 3000 mm    H max = 3000 mm\*\*

\* Up to H = 3000 mm, blind supplied with tilt-only function and locked bottom rail

\*\* For areas from 5.26 m<sup>2</sup> to 9 m<sup>2</sup>, blind supplied with tilt-only function and completely raised.