



SL20-22SP Pleated Blackout

ScreenLine® SL20-22SP Pleated Blackout is a patented magnetic system with manual operation (raising function) for pleated blackout blinds incorporated within 20-mm or 22-mm double glazing units and fitted into window frames. It is suited to all areas requiring complete privacy.

SL20-22SP Pleated Blackout is operated by a magnetic slider, placed on the right or left-hand edge of the glass. A narrow adhesive transparent profile ensures the linear movement of the slider. The blind is raised and lowered by moving the slider up or down.


The system is equipped with double-projection black (RAL 9005) warm edge spacer bars as standard in order to reduce reflected light, thus favouring complete darkening effect.

SL20-22SP Pleated is suited to all types of window frames. It ensures with time the insulating properties of the double-glazing unit, notably protection from dirt or weather conditions. The integrated unit can be fitted into the window frame like standard IGUs.

The magnetic slider is treated with a Sanitized®* patented finish, which provides a long-lasting antimicrobial protection function.




COLOUR RANGE



S102 white/white

* Active biocidal substance: silver borophosphate glass

FEASIBILITY CHARTS

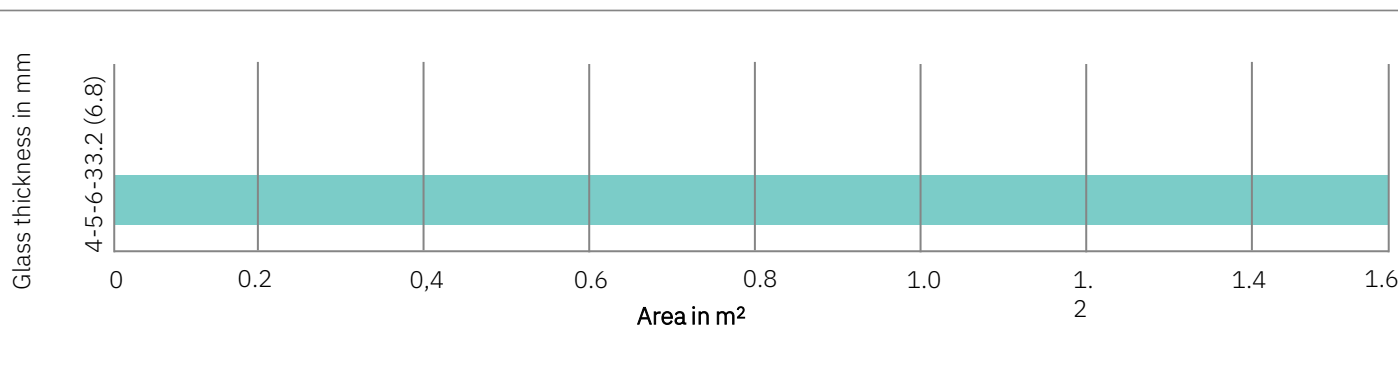

Possible dimensions

W min = 300 mm W max = 1200 mm
H min = 450 mm* H max = 2200 mm

Maximum height possible according to width

with W from 300 to 400 mm H max = 1800 mm
with W from 401 to 1200 mm H max = 2200 mm

*Per H da 450 mm a 900 mm con comando diretto

*Per H da 901 mm a 2200 mm con comando ridotto

Stack height: 4% glass H + 59 mm